


Overview

HP RP2 Retail System

FRONT VIEW

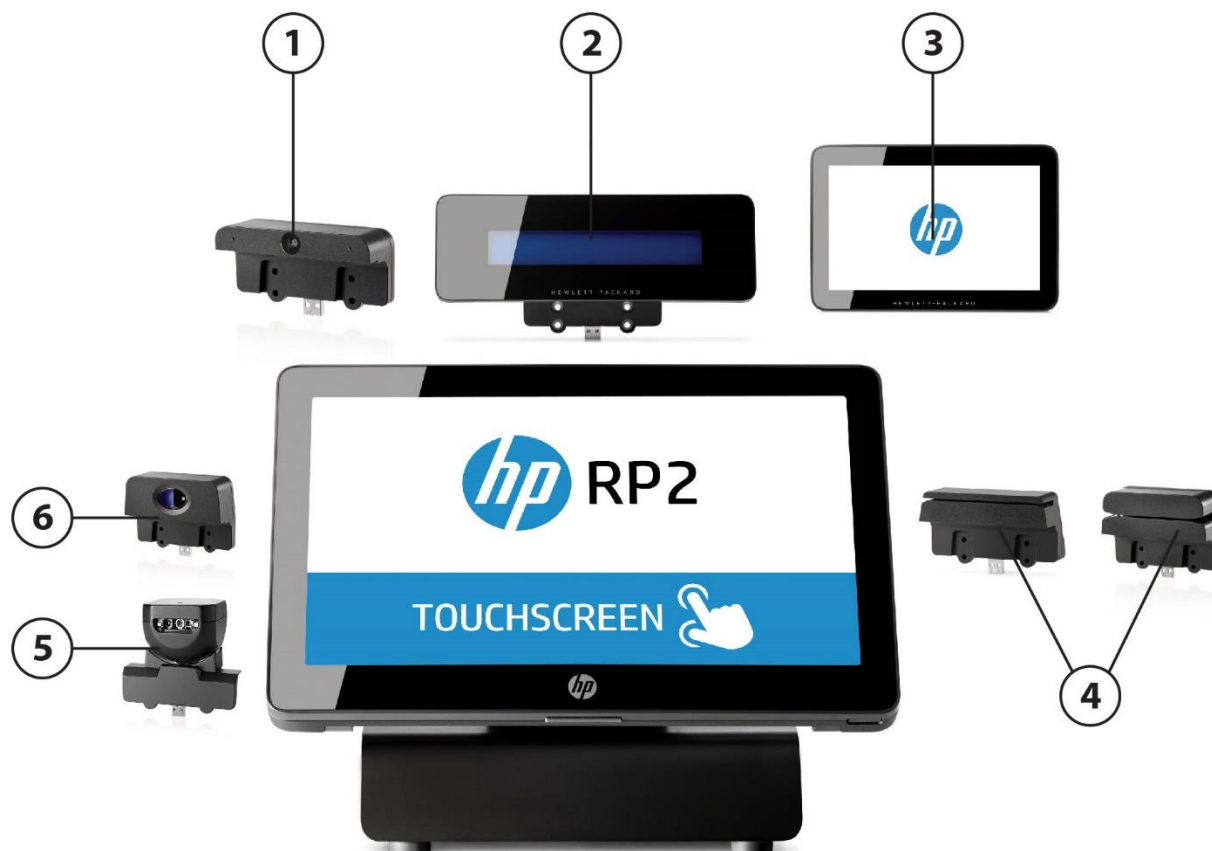

1. HP Retail Integrated Webcam
2. HP Retail Integrated 2x20 Display (complex or non-complex)
3. HP Retail Integrated 7-inch Customer Facing Display
4. HP Retail Integrated MSR (Single - Head or Dual - Head)
5. HP Retail Integrated Barcode Scanner
6. HP Retail Integrated Fingerprint Reader

Note: RP2 Image depicts the Model 2020* and Model 2030 (Projected Capacitive touch technology)

*Model 2020 available in the Americas region only.

Overview

I/O PANEL (BOTTOM OF DISPLAY)



1. AC Power Connector (DC-in)
2. 24V powered USB
3. Cash Drawer Port (Supports 2 cash drawers with optional cable splitter kit)
4. 12V powered USB
5. DisplayPort 1.2 (for a secondary display)
6. Headset/ Line Out Connector for powered audio devices (Green)
7. Microphone / Line-in Audio Connector (blue)
8. RJ-45 Network Connector (10/100/1000 Ethernet LAN)
9. 1 USB 3.0 Port
10. 3 USB 2.0 Ports
11. 4 RJ-50 Serial Ports (Power configurable 0V (default), 5V, 12V)
12. Power Button


Note: RJ50 to DB9 Adapter cables are optional.

Image depicts all models of the HP RP2 Retail System.

*Model 2020 available in the Americas region only

Overview

REAR VIEW

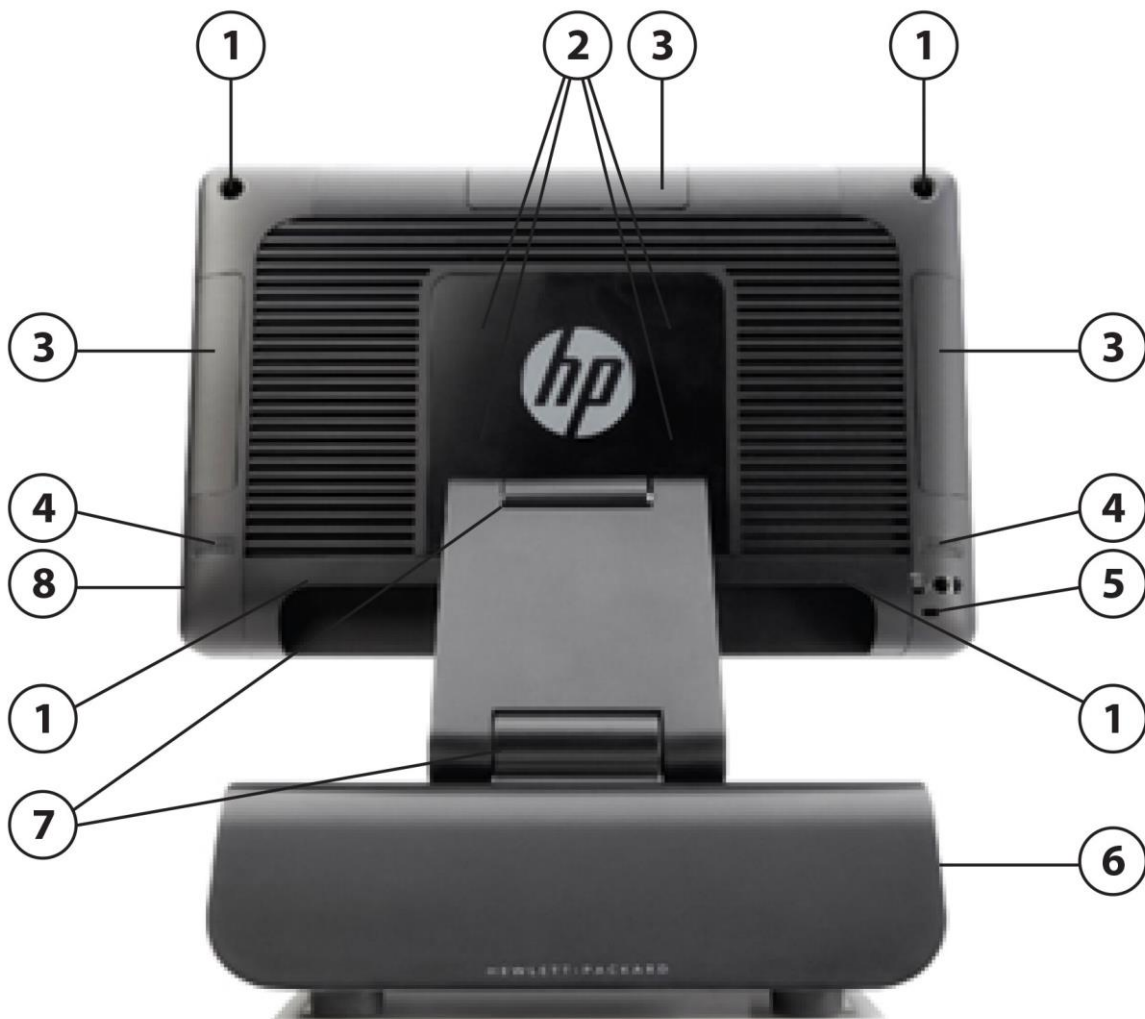

1. Captive Screws (loosen to access core components)
2. 75mm VESA mounting holes
3. HP USB peripheral module connectors
4. Integrated Speakers

5. Security Lock Slot
6. Power Supply (internal in base)
7. Dual Hinge
8. Hard Drive Activity Light

Note: Image depicts all models of the HP RP2 Retail System

Overview

At A Glance

- Designed for deployment within retail and hospitality markets
- Choice of display touch technology:
 - 14 inch diagonal wide-aspect display 5-wire resistive touch (Model 2000)
 - 14 inch diagonal wide-aspect display projected capacitive touch (Model 2020*, 2030)
- Processor choices:
 - Intel® Quad-Core J1900 Celeron™ (2.00 GHz, 2 MB Cache) (Model 2000, Model 2020*)
 - Intel® Quad-Core J2900 Pentium™ (2.41 GHz, 2 MB Cache) (Model 2030)
- Operating System choices (Pre-installed):
 - Windows 10 IoT Enterprise For Retail (64-bit)*
 - Windows 10 Pro (64-bit)
 - Windows Embedded 8.1 Industry Pro Retail (64-bit)***
 - Windows 8.1 Pro (64-bit – Available through downgrade rights from Windows 10 Pro)***
 - Windows 8.1 Pro (64-bit)***
 - Windows 7 Pro (32-bit or 64-bit)
 - Windows 7 Pro (32-bit or 64-bit - Available through downgrade rights from Windows 10 Pro)**
 - Windows Embedded POSReady 7 (32-bit or 64-bit)
 - FreeDOS 2.0
- SSD's and SATA HDD's available
- DDR3 Synchronous Dynamic Random Access Memory (SDRAM) up to 8 GB
- Sealed and fan-less unit. Rated IP54, water and dust resistant
- VESA mounting holes (100 mm x 100 mm and 75 mm x 75 mm)
- Energy Star® qualified, EU Compliant, RoHS2 Compliant
- 89% energy efficient power supply (enclosed in stand)
- HP Limited Warranty, 3/3/3 standard: 3 years parts, 3 years labor, and 3 years on-site services
- Integrated peripheral options (can also be purchased and installed separately):
 - HP Retail Integrated Dual-Head MSR
 - HP Retail Integrated Single-Head MSR
 - HP Retail Integrated Fingerprint Reader
 - HP Retail Integrated Webcam
 - HP Retail Integrated Barcode Scanner
 - HP Retail Integrated 2x20 LCD Customer Facing Display (Complex and Non-Complex character versions)
 - HP Retail Integrated 7" Diagonal CFD Display

* Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows 10 is automatically updated, which is always enabled. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.microsoft.com>.

** This system is preinstalled with Windows 7 Pro software and also comes with a license and media for Windows 8.1 Pro software. You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

*** Not all features are available in all editions of Windows 8.1. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows 8.1 functionality. See <http://www.microsoft.com>.

Model 2020 available in the Americas region only

NOTE: See important legal disclosures for all listed specs in their respective features sections.

Standard Features and Configurable Components

MODELS

Model	Display Touch Technology	Processor	AV
RP2 Retail System, Model 2000	5-Wire Resistive - Single Touch	Intel Quad Core J1900 Celeron	F6H48AV, J4E31AV (APJ Only)
RP2 Retail System, Model 2020 (Available in the AMS region only)	Projected Capacitive, 10 Multi-Touch	Intel Quad Core J1900 Celeron	J7W29AV
RP2 Retail System, Model 2030	Projected Capacitive, 10 Multi-Touch	Intel Quad Core J2900 Pentium	J2A63AV, J4E32AV (APJ Only)

OPERATING SYSTEM

Preinstalled

- Windows 10 IoT Enterprise For Retail, (64-bit)¹
- Windows 10 Pro, (64-bit)¹
- Windows Embedded 8.1 Industry Pro Retail, (64-bit)²
- Windows 8.1 Pro (64-bit – Available through downgrade rights from Windows 10 Pro)²
- Windows 8.1 Pro (64-bit)
- Windows 7 Pro (32-bit or 64-bit)
- Windows 7 Pro (32-bit or 64-bit - Available through downgrade rights from Windows 10 Pro)³
- Windows Embedded POSReady 7 (32-bit or 64-bit)⁴
- FreeDOS 2.0

Certified

Linux Ubuntu 14.04 LTS⁵

¹ Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows 10 is automatically updated, which is always enabled. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.microsoft.com>.

² Not all features are available in all editions of Windows 8.1. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows 8.1 functionality. See <http://www.microsoft.com>.

³ This system is preinstalled with Windows 7 Pro software and also comes with a license and media for [Windows 10 Pro software](#). You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

⁴ Preinstalled with POSReady 7, (32-bit or 64-bit, depending on customer requirements) software and also comes with a license and media for [Windows 10 IoT Enterprise For Retail software](#). You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

⁵ Not all features are supported in Ubuntu Linux.

NOTE: This device has been certified for Windows 10 as a Specialized PC (SPC). The SPC certification program allows for the certification of commercial devices designed with industry specific features that conflict with the standard Windows 10 multi-touch certification requirements expected of a touch panel. In this case the touch capability of the RP2 Retail system is designed to support Retail Point of Sale applications which only require single touch (Resistive) or simple multi-touch (Projected Capacitive) features. Please refer to the Display specifications for display features.

Standard Features and Configurable Components

PROCESSORS

Intel® Quad Core™ J1900 Celeron® with Intel HD Graphics (2.00 GHz, 2 MB cache, 4 cores) ; Model 2000, Model 2020*

Intel® Quad Core™ J2900 Pentium® with Intel HD Graphic (2.41 GHz, 2 MB cache, 4 cores); Model 2030

Note: Multi-core is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. 64-bit computing system required. Performance will vary depending on your hardware and software configurations. Intel numbering is not a measurement of higher performance.

*Model 2020 available in the Americas region only

CHIPSET

Integrated with processor

Note: Multi-core is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. 64-bit computing system required. Performance will vary depending on your hardware and software configurations. Intel numbering is not a measurement of higher performance.

OPERATOR DISPLAY

14" Diagonal Resistive Operator Display (Model 2000)

Touch Technology	5-Wire Resistive
Screen Diagonal (inches)	14 inch diagonal
Resolution	1366 x 768
Aspect Ratio	16:9
Anti-Glare	Yes
Viewing Angle	x axis, right ($\Phi=0^\circ$) 40~45 degree x axis, left ($\Phi=180^\circ$) 40~45 degree y axis, up ($\Phi=90^\circ$) 10~15 degree y axis, down ($\Phi=270^\circ$) 30~35 degree
Viewable Image Area (Diagonal)	309.40mm x 173.95mm
Bezel/Bezel Free	Bezel
Number of Multi-Touch	1
Pixel Pitch	0.2265mm x 0.2265 mm
Backlight	WLED

14" Diagonal Projected Capacitive Operator Display (Model 2020* and Model 2030)

Touch Technology	Projected Capacitive, 10 Multi-Touch
Screen Diagonal (inches)	14 inch diagonal
Resolution	1366x768
Aspect Ratio	16:9
Anti-Glare	Yes

Standard Features and Configurable Components

Viewing Angle	x axis, right($\Phi=0^\circ$) 40~45 degree x axis, left ($\Phi=180^\circ$) 40~45 degree y axis, up ($\Phi=90^\circ$) 10~15 degree y axis, down ($\Phi=270^\circ$) 30~35 degree
Viewable Image Area (Diagonal)	309.40mm x 173.95mm
Bezel/Bezel Free	Bezel Free
Number of Multi-Touch	10
Pixel Pitch	0.2265mm x 0.2265 mm
Backlight	WLED

NOTE: All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

*Model 2020 available in the Americas region only

STORAGE*

Size	2.5"	
Drive Bays	1	
Options:	2.5" SATA Hard Drives	320GB 7200 RPM SATA 2.5" Hard Drive 500 GB 7200 RPM SATA 2.5" Hard Drive
	2.5" Self-Encrypting SATA	500 GB 7200 RPM SATA 2.5" SED Hard Drive
	2.5" Solid State Drives	32 GB SATA SSD, 2.5" ¹
	2.5" Self Encrypting Solid State Drives	64 GB SATA SSD, 2.5" 128GB SATA 2.5" SED SSD 256GB SATA 2.5" SED SSD
	2.5" SATA 3D SSD	128GB SATA 2.5 3D SSD 256GB SATA 2.5 3D SSD

¹ 32 GB SATA SSD drive will be available to ship only with FreeDOS. This drive will no longer be available after November 30th, 2015.

*For hard drives and solid state drives, GB = 1 billion bytes. Actual formatted capacity is less. Up to 16 GB (for Windows 7) and 36 GB (for Windows 8.1) of system disk is reserved for the system recovery software.

MEMORY

Type

Non-ECC, DDR3 SODIMM, 1600 MHz, SDRAM

Maximum

8 GB

of Slots

1

The HP RP2 Retail System supports DDR3 SDRAM (1600 MHz).

Standard Features and Configurable Components

NOTE: Maximum memory capacities assume Windows 64-bit operating systems or Linux. With Windows 32-bit operating systems, memory above 3 GB may not all be available due to system resource requirements.

CAUTION: You must shut down the Retail System and disconnect the power cord before adding or removing memory modules. Regardless of the power-on state, voltage is always supplied to the memory modules as long as the Retail System is plugged in to an active AC outlet. Adding or removing memory modules while voltage is present may cause irreparable damage to the memory modules or system board.

MEMORY CONFIGURATIONS

Total Memory	Slot
4 GB	Single 4 GB SODIMM
8 GB	Single 8 GB SODIMM

SECURITY SOLUTIONS AND CAPABILITIES

- Security lock slot
- Bolt to counter feature
- HP Keyed Lock Cable Kit (optional)

Key features of the RP2 BIOS include:

- Deployment and manageability — RP2 BIOS provides several technologies that help integrate the HP RP2 Retail MO System into the enterprise, such as PXE, remote configuration, and F10 Setup support for 12 languages.
- Stability— RP2 BIOS supports the HP stable product roadmap by releasing only critical BIOS changes to the factory and advanced change notification.
- Support UEFI specification 2.1
- Thermal and power management - The RP2 BIOS provides and enables thermal and power management technologies so component temperatures are managed for high reliability and to assist in operating the RP2 Retail System in any enterprise environment.
- Upgrades and recovery - RP2 BIOS provides numerous ways to upgrade the RP2 Retail System, including BIOS updates from within DOS, BIOS updates from within Windows, and fail-safe recovery (Emergency Boot Block Recovery).
- RP2 BIOS uses PKI signing of the BIOS for trusted BIOS upgrades and recovery.
- Serviceability —RP2 BIOS provides diagnostic and detailed service information.

Additional RP2 BIOS Features:

- Power-On password - Helps prevent an unauthorized user from powering on the system.
- Setup password -Helps prevent unauthorized changes to the system configuration. If the Setup password is not known, the BIOS version cannot be changed and changes cannot be made to BIOS settings using F10 setup or under the OS.
- Advanced Configuration and Power Interface (ACPI) - Represents a significant innovation in power and configuration management, allowing operating systems and applications to manage power based on activity and usage. HP RP2 Retail System models use ACPI to provide power conservation features.

Standard Features and Configurable Components

- S5 Max Power Savings setting supports EU Lot6 requirement and allows the computer to power down below 1W in S5 (when turned off). When S5 Max Power Savings feature is enabled power to slots is turned off along with WOL functionality.
 - Master Boot Record Security - Helps to prevent changes and/or infections to the Master Boot Record caused by viruses or malicious code.
 - RP2 BIOS Protection — prevents unauthorized updates or changes to the BIOS due to malware, viruses, or malicious BIOS updates. Based on NIST SP800-147 policy guidelines.
-

Standard Features and Configurable Components

INTEGRATED PERIPHERAL OPTIONS

HP Retail Integrated Dual-Head MSR



QZ673AA/G7V45AV

General	Magnetic stripe formats	ISO 7811 (JIS I), AAMVA
	Card thickness	0.015 to 0.045 in (0.38 to 1.14 mm)
	Indicators	Audio
Mechanical	Dimensions (LxWxH)	3.94in x 3.06in x 1.34in (99.98mm x 77.8mm x 34mm)
	Weight	4.06 oz (115g)
	Slot width	0.45 in (0.114 cm)
	Color	HP Black
Interface/ Connection	Interface	USB 2.0
	Connection	Type A
Power	Voltage (typical)	5.0V +/- 5% supplied by USB, 50mV ripple max
	Current consumption (typical)	40mA max
Drivers		Windows Native, OPOS, JPOS
Operating Systems	Compatibility	Microsoft Windows 8.1 Pro 64-bit*
		Microsoft Windows Embedded 8.1 Industry Pro Retail 64-bit*
		Microsoft Windows 7 Professional 32-bit**
		Microsoft Windows 7 Professional 64-bit**
		Microsoft Windows Embedded POSReady 7 32-bit
		Microsoft Windows Embedded POSReady 7 64-bit

* Not all features are available in all editions of Windows 8.1. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows 8.1 functionality. See <http://www.microsoft.com>.

** Not all features are available in all editions of Windows 7. This system may require upgraded and/or separately purchased hardware to take full advantage of Windows 7 functionality. See <http://www.microsoft.com/windows/windows-7/> for details.

Option Kit Contents HP Retail Integrated Dual-Head MSR, HP Point of Sale System Software and Documentation CD.

Standard Features and Configurable Components

HP Integrated Single-Head MSR



J1A33AA / F6F09AV

General	Magnetic stripe formats	ISO 7811, AAMVA
	Card thickness	0.015 to 0.045 in (0.38 to 1.14 mm)
	Indicators	Bi-Colored LED, beeper
Mechanical	Dimensions (LxWxH)	2.5 x 1.7 x 3.9 in (63.5 x 43.1 x 99.1mm)
	Weight	87g
	Slot width	0.045 in (1.14 mm)
	Color	HP Black
Interface/Connection	Interface	USB 2.0
	Connection	Type A
Power	Voltage (typical)	5 VDC +/- 10%, 50mV ripple max
	Current consumption (typical)	40mA max
Drivers	Windows native, OPOS, JPOS	
Operating Systems	Compatibility	Microsoft Windows Industry 8.1 Pro Retail 32-bit*
		Microsoft Windows Industry 8.1 Pro Retail 64-bit*
		Microsoft Windows 8.1 Professional 32-bit*
		Microsoft Windows 8.1 Professional 64-bit*
		Genuine Windows 7 Professional 32-bit**
		Genuine Windows 7 Professional 64-bit**
	Genuine Windows Embedded POSReady 7 32-bit	
	Genuine Windows Embedded POSReady 7 64-bit	

* Not all features are available in all editions of Windows 8.1. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows 8.1 functionality. See <http://www.microsoft.com>.

** Not all features are available in all editions of Windows 7. This system may require upgraded and/or separately purchased hardware to take full advantage of Windows 7 functionality. See <http://www.microsoft.com/windows/windows-7/> for details.

Reliability	1,000,000 card swipes minimum
Agency Certifications	FCC Class A, UL, CE, CISPR22, VCCI, WEEE, WHQL, USB-IF, RoHS
Option kit contents	HP Integrated Single-Head MSR, Documentation CD and the Options Warranty Manual

Standard Features and Configurable Components

HP Retail Integrated Barcode Scanner



E1L07AA/ G3H10AV

General	Indicators	Audible and visual read indicators
	Scan direction	Omni-directional
Symbologies	1D / Linear Codes	Autodiscriminates all standard 1D codes including GS1 DataBar™ linear codes.
	2D Codes	Aztec Code; China Han Xin Code; Data Matrix; MaxiCode; Micro QR Code; QR Code
	Postal codes	Australian Post; British Post; China Post; IMB; Japanese Post; KIX Post; Korea Post; Planet Code; Postnet; Royal Mail Code (RM4SCC)
	Stacked codes	EAN/JAN Composites; GS1 DataBar Composites; GS1 DataBar Expanded Stacked; GS1 DataBar Stacked; GS1 DataBar Stacked Omnidirect
Depth of field	Code 39: 5 mils	4.7 to 17.7 cm (1.8 to 7.0 in)
	Code 39: 10 mils	1.7 to 33.2 cm (0.7 to 13.1 in)
	Data Matrix: 10 mils	2.7 to 17.1 cm (1.0 to 6.7 in)
	Data Matrix: 15 mils	1.2 to 24.6 cm (0.5 to 9.7 in)
	EAN: 13 mils	2.5 to 41.9 cm (1.0 to 16.5 in)
	PDF417: 10 mils	2.2 to 23.9 cm (0.9 to 9.4 in)
	QR Code: 10 mils	3.5 to 16.0 cm (1.4 to 6.3 in)
Mechanical	Dimensions (LxWxH)	4.63 x 3.94 x 2.09 in
	Weight	6.1 ounces (172g) (approximately)
	Adjustability	±120(side to side), ±1.5 +90/-5(down/up), ±1.5
	Color	HP Black
Interface/ Connection	Interface	USB 2.0
	Connection	Type A
Power	Voltage (typical)	5.0V +/- 5% supplied by USB
	Current consumption (typical)	<180mA
Drivers		Windows Native, OPOS, JPOS

Standard Features and Configurable Components

Operating Systems

Compatibility

Microsoft Windows Embedded 8.1 Industry Pro Retail 32-bit*

Microsoft Windows Embedded 8.1 Industry Pro Retail 64-bit *

Microsoft Windows 8.1 Pro 32-bit*

Microsoft Windows 8.1 Pro 64-bit*

Windows 8 Professional 32-bit*

Windows 8 Professional 64-bit*

Windows 7 Professional 32-bit**

Windows 7 Professional 64-bit**

Windows Embedded POSReady 7 32-bit

Windows Embedded POSReady 7 64-bit

* Not all features are available in all editions of Windows 8.1. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows 8.1 functionality. See <http://www.microsoft.com>.

** Not all features are available in all editions of Windows 7. This system may require upgraded and/or separately purchased hardware to take full advantage of Windows 7 functionality. See <http://www.microsoft.com/windows/windows-7/> for details.

Options Kit Contents

HP Retail Integrated Barcode Scanner, HP Point of Sale System Software and Documentation CD.
Drivers for the HP Retail Integrated Barcode Scanner are on www.hp.com

Standard Features and Configurable Components

HP Retail Integrated Fingerprint Reader



QZ672AA/ F6F05AV

General	Scan Data	8-bit grayscale (256 levels of gray)
	Pixel resolution	512 dpi (average x,y over the scan area) 0.57 in (14.6 mm) (nom. width at center) 0.71 in (18.1 mm) (nom. length)
	Scan capture area	
Mechanical	Dimensions (L x W x H)	3.94 x 3.06 x 1.34 in (99.98 x 77.8 x 34 mm)
	Weight	3.39 oz (96 g)
	Color	HP Black
Interface/ Connection	Interface	USB 2.0
Power	Supply Voltage	5.0V ±5% supplied by USB
	Supply Current scanning	< 100 mA (Typical)
	Supply Current idle mode 1	20 mA (Typical)
	Supply Current—suspend mode	< 0.5 mA (Maximum)
Environmental	Temperature	Operating 0° - 40 C°
	Humidity	Operating 20% - 80% non-condensing
Drivers		Windows Native
Operating Systems	Compatibility	Microsoft Windows Embedded 8.1 Industry Pro Retail 64-bit* Microsoft Windows 8.1 Pro 64-bit* Microsoft Windows 7 Professional 32-bit** Microsoft Windows Embedded POSReady 7 32-bit Microsoft Windows Embedded POSReady 7 64-bit

* Not all features are available in all editions of Windows 8.1. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows 8.1 functionality. See <http://www.microsoft.com>.

** Not all features are available in all editions of Windows 7. This system may require upgraded and/or separately purchased hardware to take full advantage of Windows 7 functionality. See <http://www.microsoft.com/windows/windows-7/> for details.

Option Kit Contents HP Retail Integrated Fingerprint Reader, HP Point of Sale System Software and Documentation CD.

Standard Features and Configurable Components

HP Retail Integrated Webcam



QZ700AA/ F6F12AV

General	CMOS Sensor	OV9726
	Resolution	HD: 1280x720 Automatic Exposure, Automatic White Balance, Automatic Gain
	Image Control	
	Field of View	74.9°
	Focus Distance	19.69 in (500 mm)
	Focus Range	20.5cm ~ infinity
	Microphone	Yes (2, Stereo)
Mechanical	Dimensions (LxWxH)	3.94in x 1.77in x 1.34in (100mm x 44.9mm x 34mm)
	Weight	2.05 oz (58g)
	Color	HP Black
Interface/Connection	Interface	USB 2.0
Power	Voltage (typical)	3.3V (5V to 3.3V conversion board inside Webcam module to make it USB compatible)
	Current consumption (typical)	150mA
Drivers		Windows Native
Operating Systems	Compatibility	Microsoft Windows Embedded 8.1 Industry Pro Retail 32-bit*
		Microsoft Windows Embedded 8.1 Industry Pro Retail 64-bit*
		Windows 8.1 Professional 32-bit*
		Windows 8.1 Professional 64-bit*
		Microsoft Windows 7 Professional 32-bit**
		Microsoft Windows 7 Professional 64-bit**
		Microsoft Windows Embedded POSReady 7 32-bit
		Microsoft Windows Embedded POSReady 7 64-bit

* Not all features are available in all editions of Windows 8.1. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows 8.1 functionality. See <http://www.microsoft.com>.

** Not all features are available in all editions of Windows 7. This system may require upgraded and/or separately purchased hardware to take full advantage of Windows 7 functionality. See <http://www.microsoft.com/windows/windows-7/> for details.

Option Kit Contents HP Retail Integrated Webcam, HP Installation Guide.

Standard Features and Configurable Components

HP Retail Integrated 7 inch LCD CFD Display



F7A92AA/ F6F04AV

Display type		LCD, LED Backlit
Brightness		250 cd/m ²
Dimensions	mm	185 x 53.5 x 125 (mm)
	inches	7.28 x 2.11 x 4.92 in
Temperature Range		50° to 104° F (10 to 40° C) at 20% to 85% humidity (non-condensing at ambient)
	Operating:	-22° to 149° F (-30° to 65° C) at 5% to 90% humidity (non-condensing at ambient)
	Non-operating:	Tilt range of motion: 293 degrees
Adjustability		1.52lb / .69kg
Weight		USB (mounted to the top display USB port only)
Interface		Full load current: 5V 2.5W(DC +5V , 500mA)
Power	Operating voltage	0.64W (DC+5V , 128mA)
	Idle current	
Compatibility	Product	HP L6015tm or L6017tm display, RP2 or HP RP7 Retail System
	Operating systems	Microsoft Windows Embedded 8.1 Industry Pro Retail 32-bit*
		Microsoft Windows Embedded 8.1 Industry Pro Retail 64-bit*
		Windows 8.1 Professional 32-bit*
		Windows 8.1 Professional 64-bit*
		Microsoft Windows 7 Professional 32-bit**
		Microsoft Windows 7 Professional 64-bit**
		Microsoft Windows Embedded POSReady 7 32-bit
		Microsoft Windows Embedded POSReady 7 64-bit

* Not all features are available in all editions of Windows 8.1. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows 8.1 functionality. See <http://www.microsoft.com>.

** Not all features are available in all editions of Windows 7. This system may require upgraded and/or separately purchased hardware to take full advantage of Windows 7 functionality. See <http://www.microsoft.com/windows/windows-7/> for details.

Option kit contents	HP Retail Integrated 7-inch CFD, HP Point of Sale System Software and Documentation CD
Service and Warranty	Limited Warranty is a three (3) year (HP Option Limited Warranty Period) parts replacement warranty. Additional HP Care Pack Services options are available to extend warranty coverage.

Standard Features and Configurable Components

HP Retail Integrated 2x20 Display (Complex or Non-Complex)



G6U79AA (Non-Complex)/ G7G29AA (Complex) / F6F00AV (Non-Complex)/ G3H08AV (Complex)

Display type		LCD, LED Backlit
Brightness		370 cd/m ²
Character Number	Non-Complex	40(20 columns x 2 lines)
	Complex	96x360 dots (20 columns x2 lines)
Character Font	Non-Complex	5x7 dot matrix
	Complex	16x16 dot matrix
Viewing Angle		Max 90 degrees
Dimensions (LxWxD)	mm	220 x 75 x 40 mm (not including the USB attachments bracket)
	inches	8.66 x 2.95 x 1.57 in
Temperature Range	Operating	50° to 104° F (10° to 40° C) at 20% to 85% humidity (non-condensing at ambient)
	Non-operating	-22° to 149° F (-30° to 65° C) at 5% to 90% humidity (non-condensing at ambient)
Adjustability		Tilt range of motion: 179 degrees
Weight		0.74 lb/ 0.334 kg
Interface		USB
Power	Operating voltage:	5V
	Full Load Current	NonComplex model: 150mA Complex model: 240mA
	Idle current:	Non-Complex model: 140mA Complex model: 230mA
Drivers		Windows
Compatibility	Products	HP L6015tm or L6017tm Display, RP2 or HP RP7 Retail System
	Operating systems	Microsoft Windows Embedded 8.1 Industry Pro Retail 32-bit** Microsoft Windows Embedded 8.1 Industry Pro Retail 64-bit** Windows 8.1 Professional 32-bit* Windows 8.1 Professional 64-bit* Microsoft Windows 7 Professional 32-bit** Microsoft Windows 7 Professional 64-bit**

Standard Features and Configurable Components

Microsoft Windows Embedded POSReady 7 32-bit
Microsoft Windows Embedded POSReady 7 64-bit

* Not all features are available in all editions of Windows 8.1. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows 8.1 functionality. See <http://www.microsoft.com>.

** Not all features are available in all editions of Windows 7. This system may require upgraded and/or separately purchased hardware to take full advantage of Windows 7 functionality. See <http://www.microsoft.com/windows/windows-7/> for details.

Option kit contents	HP 2x20 Display, HP Point of Sale System Software and Documentation CD
Service and Warranty	Limited Warranty is a three (3) year (HP Option Limited Warranty Period) parts replacement warranty. Additional HP Care Pack Services options are available to extend warranty coverage.

Standard Features and Configurable Components

HP RP2 COMPACT STAND (AVAILABLE AS CTO ONLY)



- Industry standard 100mm VESA pattern
- Single hinge mechanism
- External power supply
- Bolt down capabilities in order to secure to a counter

Standard Features and Configurable Components

STORAGE

Size	2.5"
Drive Bays	1
Options:	2.5" SATA Hard Drives 320GB 7200 RPM SATA 2.5" Hard Drive 500 GB 7200 RPM SATA 2.5" Hard Drive
	2.5" Self Encrypting SATA Hard Drives 500 GB 7200 RPM SATA 2.5" SED Hard Drive
	2.5" Solid State Drives 32 GB SATA SSD, 2.5" SSD Hard Drive 64 GB SATA SSD, 2.5" SSD Hard Drive
	2.5" Self Encrypting Solid State Drives 128 GB SATA 2.5" SED SSD Hard Drive 256GB SATA 2.5" SED SSD Hard Drive

NOTES * 32 GB SATA SSD drive will be available to ship only with FreeDOS. This drive will no longer be available after November 30th, 2015.

Introduction:

HP Serial Advanced Technology Attachment (SATA) Hard Drives maximize the performance of HP Retail Systems by providing the technologies to meet your increasing storage demands with high-capacity drives offering superior reliability and performance.

SATA provides faster data transfer speeds, better system cooling airflow, more bandwidth, more headroom for speed increases in future generations and better data integrity. A next-generation technology, the SATA interface connects hard drives to the Retail System platform enabling easy aggregation of multiple hard drives into a single Retail System. This offers you the additional benefits of dedicated bandwidth, the ability to more easily identify device failures and scalability. The HP RP2 Retail System supports the latest SATA 6.0 Gb/s specification.

SMART IV Technology

Self-Monitoring Analysis and Reporting Technology (SMART) hard drive technology allows hard drives to monitor their own health and to raise flags if imminent failures are predicted. If the drive determines that a failure is imminent, the SMART hard drive technology enables the intelligent manageability or management software to generate a fault alert. While the current versions of SMART hard drives do a good job monitoring the data on the hard drive media, the ever increasing emphasis on reliability and quality has promoted HP to implement SMART IV technology which constantly checks that the data flow from host interface to media and media to host interface is not compromised. This is accomplished by inserting a 2 byte parity code into every 512 byte block in the data path of the hard drive's Cache RAM. This unique parity checking performed by HP's SMART IV technology hard drives, allows for more complete error detection coverage encompassing the entire data path between the host and the hard drive.

Smart IV is also known as IOEDC: I/O Error Detection Code.

Native Command Queuing

Standard Features and Configurable Components

NCQ or Native Command Queuing is a SATA protocol extension that allows the hard drive to have several write or read commands outstanding at the same time. In contrast, normal non-queued operation requires each command to be completed before the next command is issued by the host system. Queuing allows the drive to complete the commands in the order that allows for best overall throughput. It also involves an advanced method of transferring data to or from the host, called First Party Direct Memory Access (FPDMA), which allows the hard drive and the host controller to manage the data transfers for multiple outstanding commands, without involving the host processor. NCQ can contribute to better performance but the results are dependent on many factors, including the access patterns of the various applications and operating system functions that are initiating drive accesses. Enabling NCQ features in the hard drive requires AHCI support from the host system BIOS, controller, and driver. AHCI support is typically implemented in RAID configurations.

NOTE: GB = 1 billion bytes. Actual available capacity is less.

Technical Specifications – Hard Drive and Solid State Storage

HP 32GB SATA Solid State Drive, 2.5"

Capacity	32,017,047,552 bytes
Interface	Serial ATA (SATA) 3.0
Synchronous Transfer Rate (maximum)	Up to 6 Gb/s
Logical Blocks	62,533,296
Height (nominal)	7mm
Width (nominal)	Physical size: 70mm
Operating Temperature	0° to 70° C

HP 64GB SATA Solid State Drive, 2.5"

Capacity	63,023,063,040 bytes
Interface	Serial ATA (SATA) 3.0
Synchronous Transfer Rate (maximum)	Up to 6 Gb/s
Logical Blocks	123,091,920
Height (nominal)	7mm
Width (nominal)	Physical size: 70mm
Operating Temperature	0° to 70° C

Standard Features and Configurable Components

HP 128GB SATA SED Solid State Drive, 2.5"

Capacity	128,035,676,160 bytes
Interface	Serial ATA (SATA) 3.0
Synchronous Transfer Rate	Up to 6 Gb/s
Buffer Size	256 MB
Logical Blocks	250,069,680
Height (nominal)	7mm
Width (nominal)	Physical size: 70mm
Operating Temperature	0° to 70° C

HP 256GB SATA SED Solid State Drive, 2.5"

Capacity	256,060,514,304 bytes
Interface	Serial ATA (SATA) 3.0
Synchronous Transfer Rate	Up to 6 Gb/s
Buffer Size	256 MB
Logical Blocks	500,118,192
Height (nominal)	7mm
Width (nominal)	Physical size: 70mm
Operating Temperature	0° to 70° C

HP 320-GB 7.2K SATA 6.0Gb/s 2.5" Hard Disk Drive

Capacity	320,072,933,376 bytes	
Rotational Speed	7,200 rpm	
Interface	Serial ATA 3.0 (6.0 Gb/s)	
Buffer Size	16 MB	
Logical Blocks	488,397,168	
Seek Time (typical reads, includes controller overhead, including settling)	Single Track:	2.0 ms
	Average:	11 ms
	Full-Stroke:	22 ms
Height (nominal)	0.374 in/9.5 mm	
Width (nominal)	Media diameter:	2.5 in/63.5 mm
Physical size:	2.75 in/70 mm	
Operating Temperature	41° to 131° F (5° to 55° C)	

Standard Features and Configurable Components

HP 500-GB 7.2K SATA 6.0Gb/s 2.5" Hard Disk Drive

Capacity	500,107,862,016 bytes
Rotational Speed	7,200 rpm
Interface	Serial ATA 3.0 (6.0 Gb/s)
Buffer Size	16 MB
Logical Blocks	976,773,168
Seek Time (typical reads, includes controller overhead, including settling)	Single Track: 2.0 ms Average: 11 ms Full-Stroke: 25 ms
Height (nominal)	0.374 in/9.5 mm
Width (nominal)	Media diameter: 2.5 in/63.5 mm
Physical size:	2.75 in/70 mm
Operating Temperature	41° to 131° F (5° to 55° C)

HP 500-GB 7200 RPM SATA 2.5" Self-Encrypting (SED) Hard Disk Drive

Capacity	500,107,862,016 bytes
Rotational Speed	7,200 rpm
Interface	Serial ATA 3.0 (6.0 Gb/s)
Buffer Size	16 MB
Logical Blocks	976,773,168
Seek Time (typical reads, includes controller overhead, including settling)	Single Track: 1.0 ms Average: 13 ms Full-Stroke: 25 ms
Height (nominal)	0.374 in/9.5 mm
Width (nominal)	Media diameter: 2.5 in/63.5 mm
Physical size:	2.75 in/70 mm
Operating Temperature	41° to 131° F (5° to 55° C)

Standard Features and Configurable Components

NETWORK CONNECTIVITY

Optional Wireless LAN : HP 802.11a/b/g/n 2x2 Wireless Dual Band Mini Card with Bluetooth NIC ®

WLAN Standards	IEEE802.11a/b/g/n IEEE 802.11d, IEEE 802.11e, IEEE 802.11h, IEEE 802.11i, IEEE 802.11j, IEEE 802.11k	
System Interface	PCI-Express Mini Card interface	
Frequency Band	802.11b/g/n: 2.402 – 2.482 GHz; 802.11a/n: 4.9 – 4.95 GHz (Japan) 5.15 – 5.25 GHz 5.25 – 5.35 GHz 5.47 – 5.725 GHz 5.825 – 5.850 GHz	
Data rates supported	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: card will support rates for NSS=1 and NSS=2 for RX and TX for 20 and 40 MHz channels. Short and long guard interval shall be supported.	
Bluetooth	The Bluetooth component shall be compliant with Bluetooth specification version 4.0 with enhanced data rate updates across the host operating temperature range identified in the specification	
Operating temperature	-10 ⁰ C to 70 ⁰ c	
Storage Temperature	-40 ⁰ C to 80 ⁰ C, non-operating	
Humidity	10-90% operating 5-95% non-operating	
Operating Voltage	The card will be powered by a 3.3V, ± 9% supply from the host system.	
Power Consumption	Platform/ WLAN Mode	Power Consumption
	Wi-Fi	
	Transmit Mode	2W
	Receive Mode	1.6W
	Idle mode (PSP) (WLAN Associated)	250mW
	Idle mode (PSP) (WLAN unassociated)	100mW
	Radio disabled	75mW
Bluetooth Power Consumption	Peak Operating	330mW
	Receive	230mW
	USB Selective Suspend	17mW
Output Power	+13.5 dBm minimum Maximum output power must be able to achieve modular regulatory certification peak gain of +3dBi at 2.4GHz and +5dBi at 5GHz	
Security	IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only AES-CCMP: 128 bit in hardware 802.1x authentication WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. WPA2 certification	

Standard Features and Configurable Components

	IEEE 802.11i
	Cisco Certified Extensions, all versions through V5
	WAPI
Antenna	Dual antenna connectors

AUDIO/MULTIMEDIA

DTS Studio Sound audio management technology with line-out/headphone and line-in/microphone ports on I/O panel.
Two Integrated stereo speakers (standard)

POWER

Power Supply	180W External power supply, 89% Efficiency, Active PFC *This power supply meets ENERGY STAR compliance in conjunction with a select range of processors and modules.
Operating Voltage Range	90 to 264 VAC
Rated Voltage Range	100 to 240VAC
Rated Line Frequency	50/60 Hz
Operating Line Frequency Range	47 – 63 Hz
Rated Input Current	<2.9A AVG Efficiency 89% (calculated by testing at 20/50/75/100% load)
Power Supply Fan	None
ENERGY STAR® Compliant	ENERGY STAR® compliant
Power Cord Length	6.0ft (1.83m)
Current Leakage (NFPA99)	< 250 µA

WEIGHTS & DIMENSIONS

NOTE: Weight and dimensions below do not include integrated peripherals.

Weight	With stand ¹
	15.05lb / 6.83kg
	Without stand
	7.25lb/ 3.29kg
Dimensions (W x D x H)	With stand ¹
	14.01 x 8.77 x 14.42in
	355.96 x 222.80 x 366.16mm
	Without stand
	14.01 x 1.71 x 9in
	355.96mm x 43.42mm x 228.71mm

Standard Features and Configurable Components

Box Dimension (W x D x H)	23.5 x 9.5 x 20in 596.9 x 241.30 x 508mm
--------------------------------------	---

Shipping Weight	With Stand (does not include peripherals) ¹
NOTE 1: RP2 stand is sold as stand alone, see options and accessories section for more information.	14.4 lbs/ 6.5kg
	Without Stand
	7.2 lbs/ 3.3kg

Environmental Specifications

TEMPERATURE, HUMIDITY, ALTITUDE

Temperature	Operating	10 to 40° C with SSD's, 10 to 35° with HDD's
	Non-operating	-30° C to 60°C
Relative humidity	Operating	20% to 85% RH
	Non-operating	
Altitude (unpressurized)	Operating	0 -10,000 ft (3,048M)
	Non-operating	0 -30,000 ft (9,144M)

ENVIRONMENTAL & INDUSTRY

Environmental Data

Eco-Label Certifications & declarations

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- IT ECO declaration
- US ENERGY STAR®
- EPEAT <Gold> registered in the United States. See <http://www.epeat.net> for registration status in your country.

System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data for the Ultra-slim Desktop model is based on a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

Energy Consumption (in accordance with US ENERGY STAR® test method)

	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation (Short idle)	20.47 W	20.36 W	20.97 W
Normal Operation (Long idle)	16.44 W	17.17 W	16.46 W
Sleep	1.15 W	1.18 W	1.15 W
Off	0.49 W	0.55 W	0.49 W

NOTE:

Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family . HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

Heat Dissipation*	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation (Short idle)	70 BTU/hr	70 BTU/hr	72 BTU/hr
Normal Operation (Long idle)	56 BTU/hr	59 BTU/hr	56 BTU/hr
Sleep	4 BTU/hr	4 BTU/hr	4 BTU/hr
Off	2 BTU/hr	2 BTU/hr	2 BTU/hr

Environmental Specifications

***NOTE:** Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

Sound Power
($L_{WA,d}$, bels)

Sound Pressure
(L_{pAm} , decibels)

Typically Configured – Idle

2.6

16

Fixed Disk – Random writes

2.6

16

Longevity and Upgrading

This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:

- 6 USB ports
- 2 memory slots
- 1 Mini PCIe half-length slot
- 1 MXM 3.0 Type A - 35W slot
- 1 mSATA slot
- 1 2.5" internal bay supporting up to Two 2.5" hard drives (HDD/SSD/SED/SSHD)
- 1 5.25" external supporting optical drive

<edit list of features as required>

Spare parts are available throughout the warranty period and or for up to "5" years after the end of production.

Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

Mercury greater than 1ppm by weight

Cadmium greater than 20ppm by weight

Battery size: BR2032 (coin cell)

Battery type: Lithium

Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the <gold> level, see www.epeat.net
- Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043.
- This product contains 22.5% post-consumer recycled plastic (by wt.)
- This product is 96.7% recycle-able when properly disposed of at end of life.

Environmental Specifications

Packaging Materials	External:	PAPER/Corrugated	1119.4 g
		PAPER/Paper	297.4 g
	Internal:	PLASTIC/EPE (Expanded Polyethylene)	466 g
		PLASTIC/Polyethylene high density	24 g

The EPE foam packaging material is made from 0% recycled content.

The corrugated paper packaging materials contains at least 25% recycled content.

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at

<http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf>):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Packaging Usage

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

Environmental Specifications

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www8.hp.com/us/en/hp-information/environment/ecolabels.html>

ISO 14001 certificates:

http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/PC_GBU_Product_Design_ISO_14K_Certificate.pdf

and

<http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf>

Service and Support

SERVICE AND SUPPORT

On-site Warranty¹: Limited warranty delivers on-site, next business-day² service for parts and labor and includes free telephone support³ 24 x 7. The warranty terms vary by region and onsite and labor are not available in all countries. Depending on region and warranty terms, extended service offers terms up to 5 years by choosing a CarePack. To choose the right level of extended service for your HP product, visit HP Care Pack Central: <http://www.hp.com/go/cpc>

1 Terms and conditions may vary by country. Certain restrictions and exclusions apply. Other warranty variations may be offered in your region.

2 On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.

3 Technical telephone support applies only to HP-configured Compaq and third-party HP-qualified hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.

Options and Accessories (sold separately)

OPTIONS AND ACCESSORIES (SOLD SEPARATELY)

	Part Number
HP Integrated Peripherals	
HP Retail Integrated 2x20 Display (Non-Complex)	G6U79AA
HP Retail Integrated 2x20 Complex	G7G29AA
HP Retail Integrated 7-inch LCD CFD Display	F7A92AA
HP Retail Integrated Fingerprint Reader	QZ672AA
HP Retail Integrated Dual-Head MSR	QZ673AA
HP Integrated Single-Head MSR	J1A33AA
HP Retail Integrated Webcam	QZ700AA
HP Retail Integrated Barcode Scanner	E1L07AA
Input Devices	
HP POS Keyboard with MSR	FK218AA
HP USB Standard Keyboard	DT528A
HP USB Optical Mouse	QY777AA
HP USB Laser Mouse	GW405AA
Security	
HP Business PC Security Lock	PV606AA
HP Keyed Lock Cable	H4D73AA
Barcode Scanners	
HP Imaging Barcode Scanner	BW868AA
HP Linear Barcode Scanner	QY405AA
HP Presentation Barcode Scanner	QY439AA
HP Retail Integrated Barcode Scanner	E1L07AA
HP 2D Value Wireless Scanner AMO kit	K3L28AA
Cash drawers	
HP Heavy Duty Cash Drawer	FK182AA
HP Standard Duty Cash Drawer	QT457AA
HP USB Standard Duty Cash Drawer	E8E45AA
HP Flip-Top Cash Drawer (EMEA Region Only)	BW867AA
HP Cable Pack for Dual Cash Drawers	QT538AA

Options and Accessories (sold separately)

Printers

HP Powered USB Thermal Receipt Printer	FK224AA
HP Serial/USB Thermal Receipt Printer	BM476AA
HP Hybrid Printer with MICR	FK184AA
HP Value PUSB Receipt Printer	F7M67AA
HP Value Serial/USB Receipt Printer	F7M66AA
HP USB Y Cable (for Serial USB/Receipt Printer)	BM477AA

System Memory

4GB DDR3-1600 SODIMM	B4U39AA
8GB DDR3-1600 SODIMM	B4U40AA

Storage

128GB SATA 2.5 SSD	QV063AA
320 GB 7200 SATA 2.5 HDD	D1S10AA

Cables

RJ50 to DB9 cable 1 Meter	KOA29AA
RJ50 to DB9 cable 2 Meter	KOA30AA

MSR

HP Mini-MSR	FK186AA
-------------	---------

Displays

HP 7 inch standalone Pole Display	F7A93AA
HP L6015tm 15-in Monitor Capacitive Touch	A1X78A
HP L6010 10.4-in Monitor Non touch	A1X76A
HP L6017tm 17-in Monitor	A1X77A

Stands

HP RP2 Stand	K1C13AA
HP Dual Position L6010 Stand	A1X79AA
HP HT ADJL6015/17tm Stand	A1X81AA

* **NOTE:** For use with secondary retail 10", 15", and 17" displays.

Summary of Changes

SUMMARY OF CHANGES

Date of change:	Version History:		Description of change:
June 25, 2014	V1	Changed	Apply styles and corrections, edits from draft 7 to 8
July 18, 2014	V1 to v2	Changed	Weights and Dimensions section update
August 4, 2014	From v2 to v3	Changed	Environmental data table
August 12, 2014	From v3 to v4	Changed	Options and Accessories part numbers
Sept 11, 2014	From v4 to v5	Changed	Updated Environmental data for Models 2000, 2020, and 2030
October 7, 2014	From v5 to v6	Changed	Security Solutions and Capabilities and Bios sections reordered
October 8, 2015	From v6 to v7	Added	HP 2D Value Wireless Scanner AMO kit; Note about 32GB SSD availability; Note for RP2 stand, L6010 and HT ADJL6015 options
December 14, 2015	From v7 to v8	Added	Windows 10 IoT Enterprise for Retail 64-bit, Windows 10 Pro 64-bit to Overview and Operative Systems and statement
April 26, 2016	From v8 to v9	Added	128GB OR 256GB SATA 3D SSD
		Removed	Win 8.1 Pro downgrade to WIN7 Pro 32/64
June 27, 2016	From v9 to v10	Added	RP2 compact stand

Copyright © 2016 HP Development Company, L.P

All rights reserved. Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. Intel, Core, Celeron, and Pentium are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. ENERGY STAR is a registered mark owned by the U.S. government. All other product names mentioned herein may be trademarks of their respective companies. Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.