QuSector 15V-35-6 Wi-Fi 6E

QuSector 15V-35-6 offers a 35 degrees, 11dBi (2.4GHz) & 15dBi (5+7GHz) signal gain. It is a perfect indoor and outdoor device for industrial installations.

QuSector 15V-35-6 Wi-Fi 6E is a concurrent triple band, Vertical polarity, panel antenna. It operates at **2.4GHz with 11dBi gain and at 5GHz+7GHz with 15dBi gain**. Its main purpose is to build small cells in high-density environments such as stadiums, lecture halls and concert halls. High quality injection moulded enclosure allows to implement it alongside with indoor and IP67 outdoor solutions. Wide frequency range (2.4-2.5GHz & 5.0-7.125GHz) helps to find suitable frequency for the most effective operation. The antenna comes with 6*70cm (28inch) cables terminated with RPSMA, RPTNC or Nm connectors.

Wi Fi 6E | 2.4GHz + 5GHz | 15 dBi | DIRECTIONAL | IP 67 | -40° TO +80°

WI-FI SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 5.0 - 7.125GHz
GAIN	2.4 - 2.5 GHz: 11dBi 5.0 - 7.125 GHz: 15dBi
VSWR	< 2.00
BEAMWIDTH	2.4 - 2.5 GHz: 80°/40° 5.0 - 7.125GHz: 35°/25°
POLARIZATION	Vertical
IMPEDANCE	50 Ω
SEPARATION BETWEEN CONNECTORS	> 35dB
FRONT-TO-BACK	> 25dB
MAX INPUT POWER	50W
DC GROUND	Yes

MECHANICAL SPECIFICATION

MATERIAL	ABS
CONNECTOR	6xRPTNC/6xNM/6xRPTNC
OUTER DIMENSIONS	29.2 x 48.6 x 10.6 cm 11.5 x 19.13 x 4.17 inch
WEIGHT	2.5 kg
OPERATING TEMPERATURE	-40°C to +80°C -40°F to 176°F

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

MOUNTING KIT

DIMENSIONS	9.9 x 10.5 x 14.8 cm 3.9 x 4.13 x 5.83 inch
REGULATION RANGE	+/- 30°
MAST DIAMETER RANGE	25 - 65mm
MATERIAL	Polyamide with fiberglass + galvanized steel U-Bolts
WEIGHT	0.87kg
MOUNTING PLACE	Wall or ceiling or mast

COMPATIBLE ROUTERS

VARIANT: S15V.35.6NM

ACKSYS	RailTrack
ADTRAN	Bluesocket 1940
ALCATEL-LUCENT	Stellar AP1362
ARISTA	O-235E
ARUBA	AP-274, IAP-274
CISCO	AIR-CAP1552EU, AIR-CAP1552H, AIR-CAP1552WU, Catalyst 9124AXE
ENGENIUS	EWS860AP
EXTREME NETWORKS	AP 3865E, AP 7562
FORTINET	FAP-S322C, FAP-S322CR, OAP832E

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

HUAWEI	AP8130DN, AP8130DN-W
MIST	AP63E
SIEMENS	6GK5788-2GD00-0AA0, 6GK5788-2GD00-0AB0, 6GK5788-2GD00-0TA0, 6GK5788-2GD00-0TB0
ZYXEL	WAX655E (AX5400)

VARIANT: S15V.35.6RT

VARIANT: S15V.35.6RS

ACKSYS	AirBox/12
ADTRAN	Bluesocket 1935, Bluesocket 2035
AEROHIVE NETWORKS	AP245X
ARISTA	C-130E, C-230E
ARUBA	AP-228, AP-318, AP-518
D-LINK	DAP-2695
FORTINET	AP832E, FAP-U323EV
HUAWEI	AP7110DN-AGN
XIRRUS	XA4-240

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

PLOTS

VSWR

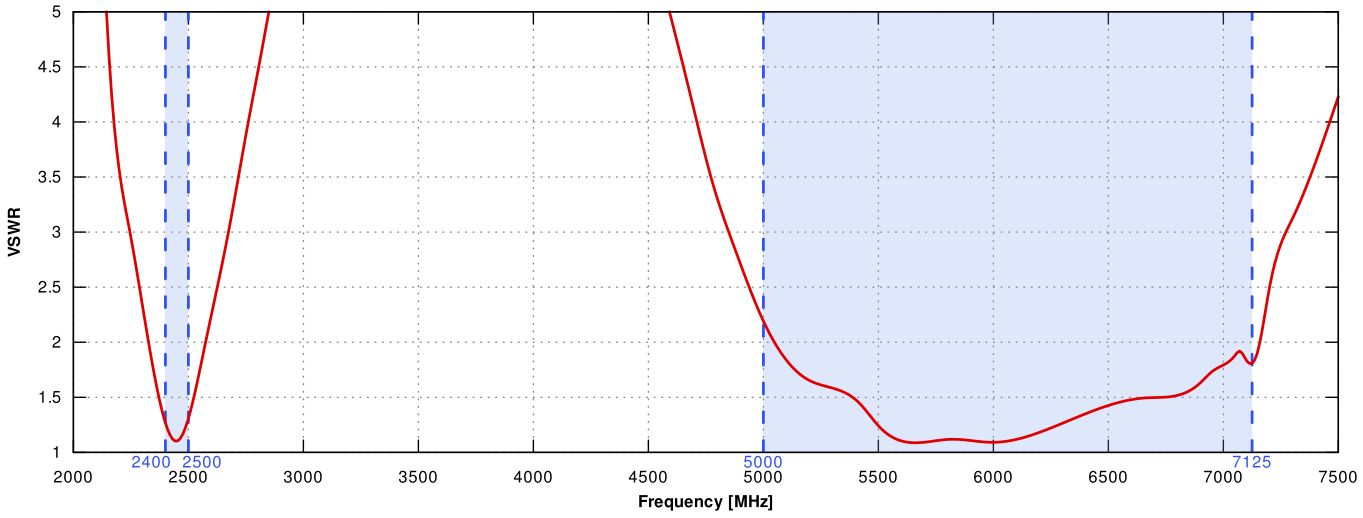

Gain

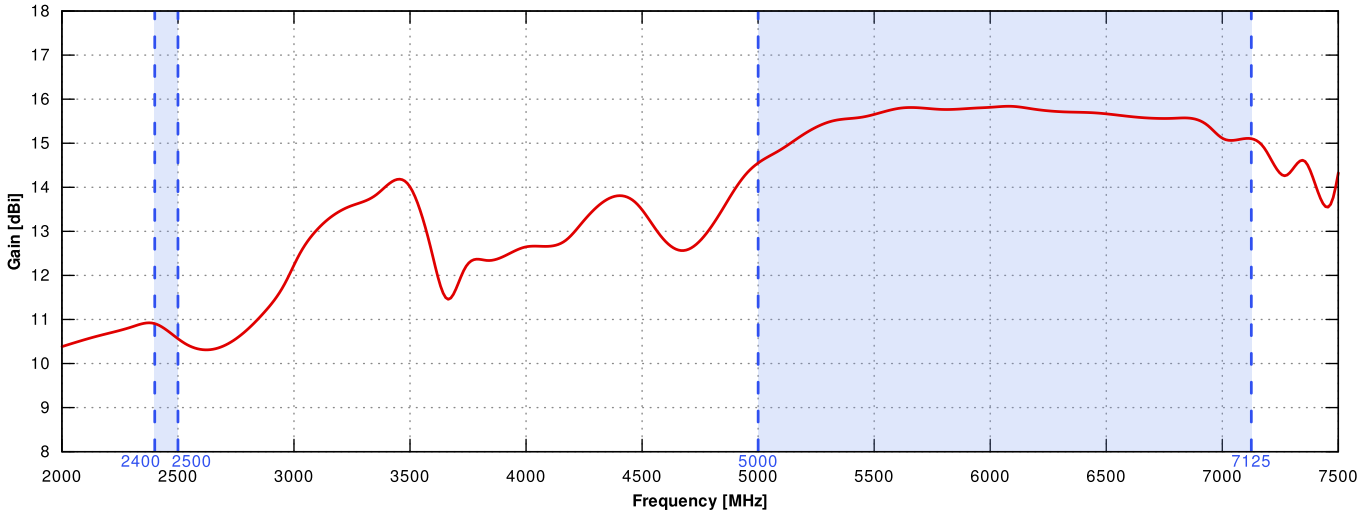

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

2.4GHz to 2.5GHz

ELEVATION

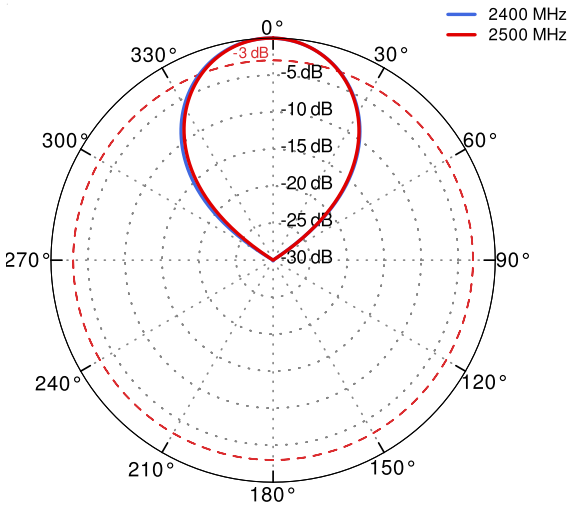

AZIMUTH

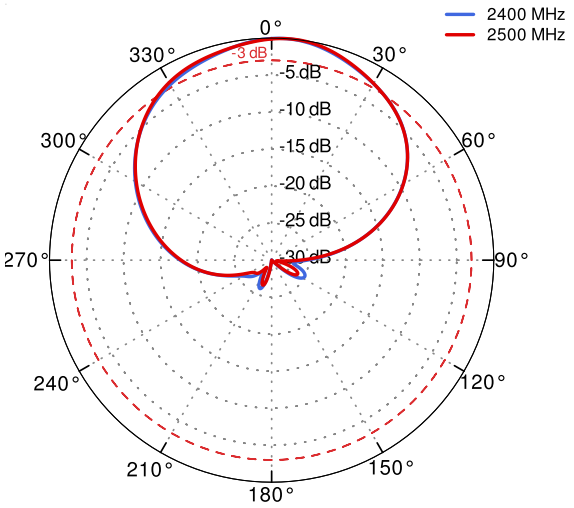

5.1GHz to 6.9GHz

ELEVATION

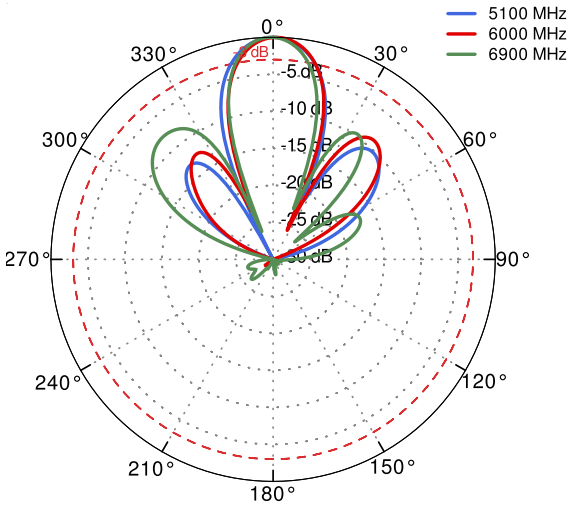

AZIMUTH

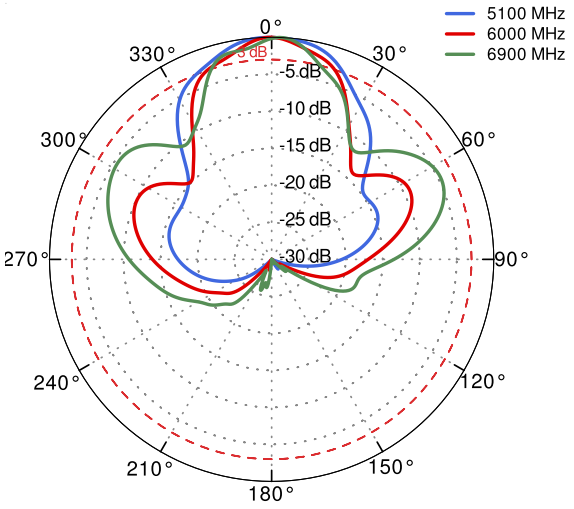

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

DIMENSIONS

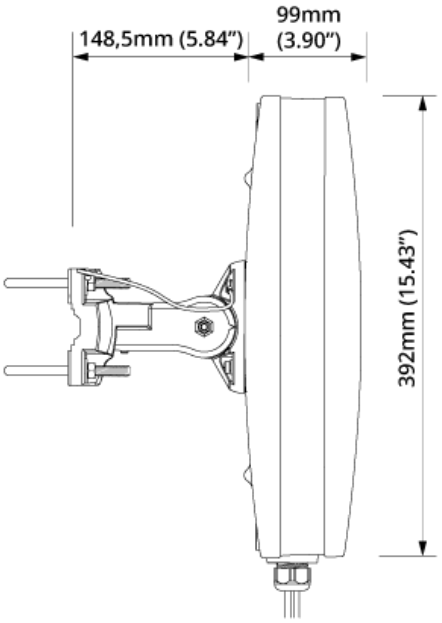

WWW.QUWIRELESS.COM

Sales email: sales@quwireless.com **Tel:** +48 513 900 416

Support email: support@quwireless.com **Website:** www.quwireless.com

Address: Wireless Instruments Sp. z o.o., ul. Kościuszki 27, 52-116 Iwiny, Poland

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.